

Vessel Turning Rolls



ProStar™ Height Adjustable Turning Rolls

Dual adjustable drive heads are designed so that the load is always centered on the rolls. Urethane wheels protect and grip the workpiece. Comes with full height adjustability for safe and stable clearance of fittings. Wheeled base is compatible with track mount installations.



PRS20TRV




PRS06R100 / 200



PRS10TRV

SPECIFICATIONS	12-TON PRS06R100 / 200	20-TON PRS10TRV100 / 200	40-TON PRS20TRV100 / 200
LOAD CAPACITY (BALANCED)	Driver: 12,000 lbs. Idler: 12,000 lbs.	Driver: 20,000 lbs. Idler: 20,000 lbs.	Driver: 40,000 lbs. Idler: 40,000 lbs.
DIAMETER RANGE	0.5 - 12 ft.	1 - 14 ft.	1 - 14 ft.
POWER REQUIREMENTS	110 V 1-ph*	240 V-1ph or 480 V 3-ph*	480 V 3-ph*
OUTPUT TORQUE	25,000 in.-lbs.	50,000 in.-lbs.	80,000 in.-lbs.
HEIGHT ADJUSTABILITY (ADJUSTABLE IN 3 IN. INCREMENTS)	23 in. - 39 in. (top of wheel)	27 in. - 45 in. (top of wheel)	30 in. - 48 in. (top of wheel)
TRACTIVE EFFORT	Single drive, 3,500 lbs.	Dual drive, 6,000 lbs.	Dual drive, 8,700 lbs.
ROTATION SPEED	5 in. / min. - 50 in. / min.	5 in. / min. - 50 in. / min.	5 in. / min. - 50 in. / min.
SHIPPING DIMENSIONS	34 in. × 103 in. × 26 in.	113 in. × 44 in. × 33 in.	116 in. × 44 in. × 31 in.
SHIPPING WEIGHT	Driver: 975 lbs. Idler: 670 lbs.	Driver: 1,950 lbs. Idler: 1,300 lbs.	Driver: 2,650 lbs. Idler: 1,700 lbs.

*208 V – 600 V input power options available. Specifications subject to change without notice. Consult your Praxair representative when ordering.

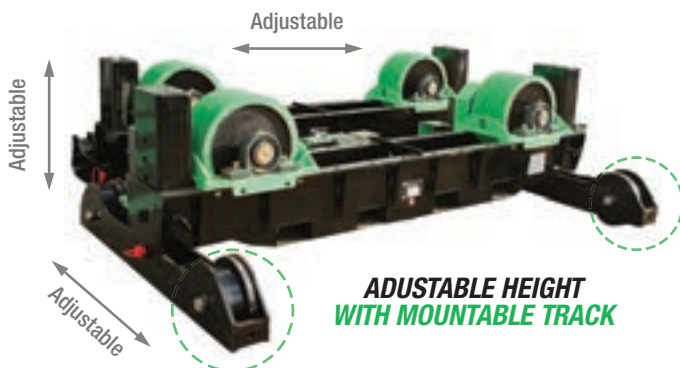

ADJUSTABLE HEIGHT WITH MOUNTABLE TRACK

Hand Pendants



PRSHP100
Heavy rubber 25 ft. cable with 19-pin metal plug. Optional LCD readout. Wireless option available.

Foot Switches



PRSF5FR Forward/Reverse
Heavy-duty cast steel body with heavy-duty guard/handle and heavy rubber 25 ft. cable with 4-pin metal plug.